


Ego 55 drive-over




Light fixture with high-performance LED light sources. Recessed floor installation. Walk-over version. Housing depths: Ego WO: 110mm - 120mm, Ego Flat WO: 60mm. Round and square version in five sizes. Consists of body, frame, black silkscreened tempered glass, recessing box. Body in EN AB44100 aluminium, silicone gaskets. Three colour options: with aluminium (only in the 50mm and 90mm size), stainless steel or black silkscreened tempered glass frame, 8mm thick, flush floor-mounting Recessing box for laying in reinforced polymer, can be ordered separately. Ego Flat WO- Feeding cable H05RN-F, with 300cm length for EGO 55 & EGO 90, 20cm for EGO 150, 30cm for EGO 220. Power connection to the mains by means of remote ballast and IP68 electrical terminal board, supplied with the fixture. Fixing to the recessing box is ensured by means of anti-vandal screws TORX, AISI 316. Glass surface temperature lower than 40°C. Fixed or adjustable optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K Screws in stainless steel AISI 316. Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-13. IP Rating IP65 IP67. Insulation class: Ego WO: class I. Ego Flat WO: class III. Installation must be carried out by specialized personnel. Carefully follow the instructions.

Steel
○

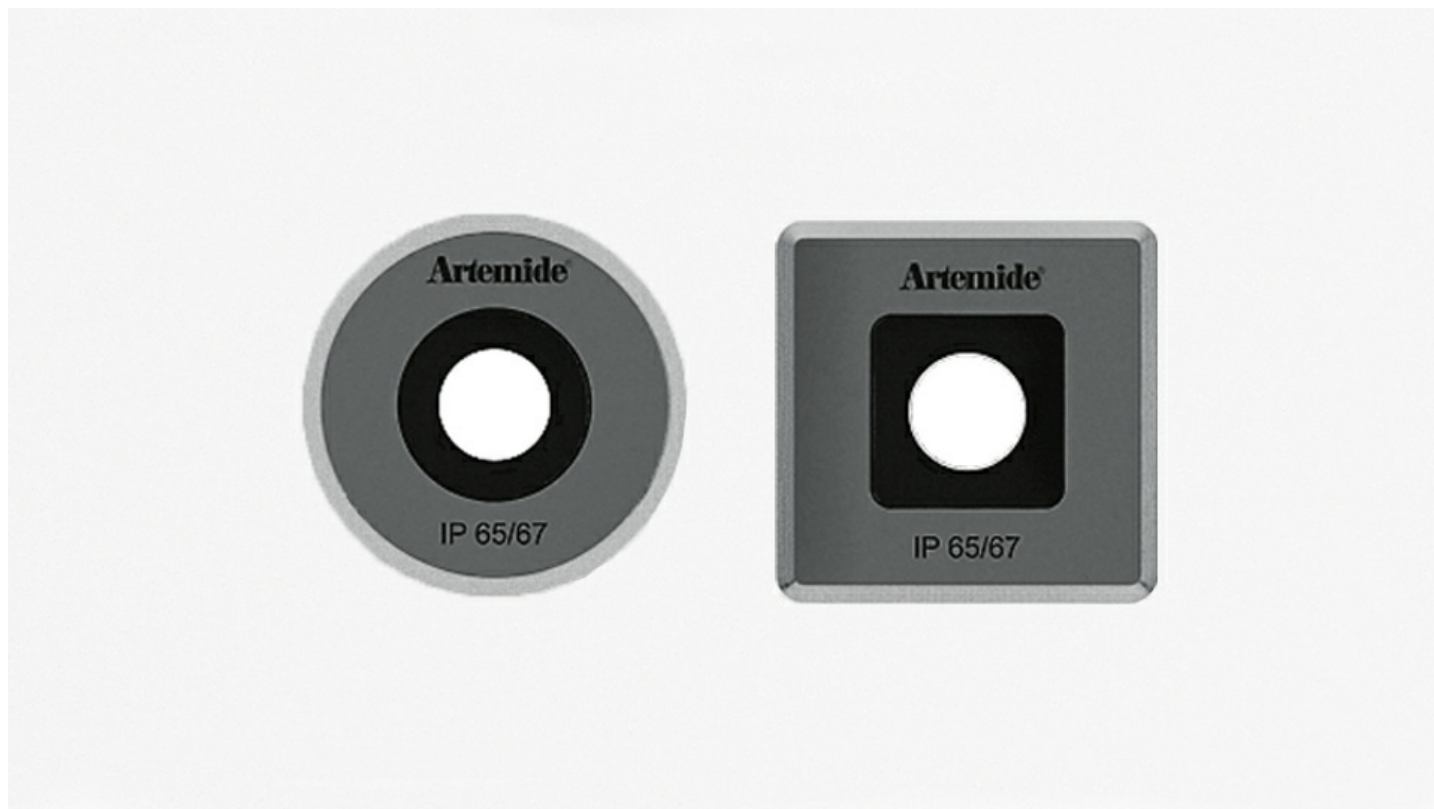

Watt	Beam	Luminous Flux (lm)	CCT	Color	Code
1.5W	16x34°	77lm	0K	●	T4002ELPTW00 + T409908
	14°	83lm	0K	●	T4002SPW00 + T409908
	32°	76lm	0K	●	T4002WFLW00 + T409908




LED Round

IP65/67



Watt	Beam	Luminous Flux (lm)	CCT	Color	Code
1.5W	16x34°	77lm	0K	●	T4032ELPTW00 + T409908
	14°	83lm	0K	●	T4032SPW00 + T409908
	32°	76lm	0K	●	T4032WFLW00 + T409908



Ego 55 drive-over LED 14°	LED	luminaire
Power	1,5W	1.5W
Flux	83lm	83lm
CCT	3000K	0K
CRI	75	
Color Tolerance	MacAdam 4SDCM	
Service Life	L70(10K) > 60500h	
Beam		14°
Efficiency		100%
Efficacy	69lm/W	55.14lm/W

Ego 55 drive-over LED 32°	LED	luminaire
Power	1,5W	1.5W
Flux	83lm	76lm
CCT	3000K	0K
CRI	75	
Color Tolerance	MacAdam 4SDCM	
Service Life	L70(10K) > 60500h	
Beam		32°
Efficiency		100%
Efficacy	69lm/W	50.83lm/W

Ego 55 drive-over LED 16x34°	LED	luminaire
Power	1,5W	1.5W
Flux	83lm	77lm
CCT	3000K	0K
CRI	75	
Color Tolerance	MacAdam 4SDCM	
Service Life	L70(10K) > 60500h	
Beam		16x34°
Efficiency		100%
Efficacy	69lm/W	51.67lm/W

Accessories

Code

NO IMAGE AVAILABLE	DRIVER 25W 24V DC	T409996
NO IMAGE AVAILABLE	DRIVER 60W 24V DC	T409998
NO IMAGE AVAILABLE	DRIVER 90W 24V DC	T409999

Designers



› Studio Artemide